


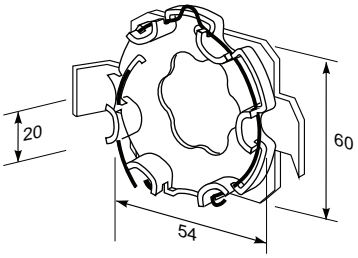

LT50/60
Mechanical Accessories

Motor Brackets

Dimensions (mm)	Cat. Number	Description
	6070518	Adjustable Motor Bracket with Spring Ring - Zinc-plated steel - Horizontally and Vertically adjustable - Lateral space requirement for installation: 27 mm - Maximum motor torque 50 Nm - Maximum system load - See note below
	6070519	LT50 HA Motor Bracket - Allows flush mounting of the motor head against the mounting surface - Zinc plated steel - Maximum motor torque - 50 Nm - Maximum system load - See note below
	6070522 6070523	LT RH Motor Bracket - Pin hole is vertical - Zinc plated steel - 10 mm square stud - Maximum motor torque - 25 Nm - Mounting Screws Cat. No 4000555 included - Maximum system load - 70 Kg. (154 Lbs.) Same as above except pin hole is horizontal
	6070524	LT60 Retrofit Bracket with Spring Ring - Zinc plated steel - Maximum motor torque - 80 Nm - Allows retrofitting new LT60 motor into old 600s brackets - Maximum system load - See note below
	6070525	LT Motor Bracket with a Square 16 x 16 mm Stud - Zinc plated steel - Maximum motor torque - 80 Nm - Required spring ring Cat. No. 4350026 not included - Maximum system load - See note below

Note: Maximum system load will vary depending on application. SOMFY recommends testing of component in actual application to determine its suitability.