Wind Sensor

animeo Solo | animeo IB+ | animeo IP | animeo KNX | animeo LON

SOLUTIONS FOR BUILDING CONTROL



Ref. 9001608

Enables the measuring of wind speed in connection with the Outside Sensor Box (ref. 9001606).

Installation advantages

> Very easy assembling on standard mast with 50 mm diameter.


> Spring clamb connectors for save and solid wiring to the Outside Sensor Box.

Functional advantages

> Provides reliable and precise wind speed measurement.

> High resilience and durability by precision bearing.



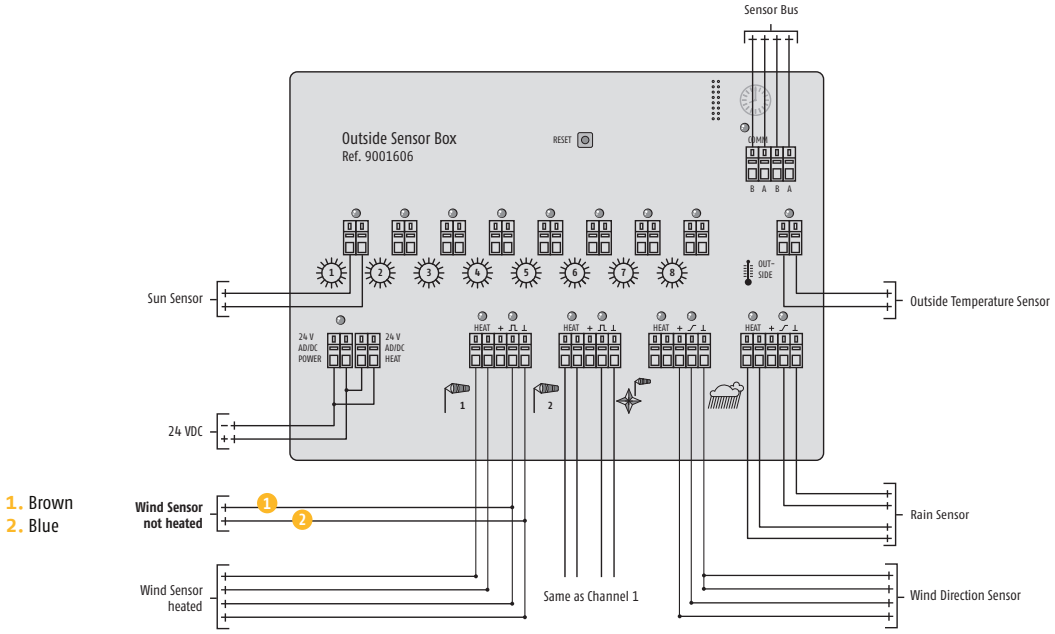

CHARACTERISTICS

Dimensions	Height 200 mm, Ø 240 mm; max. Ø-mast: 48 mm
Degree of protection	IP 65
Wiring recommendations	2 × 0.8 mm^2
Max length	100 m
Operating temperature	- 25 °C to + 75 °C
Weight	612 g
Conformity	www.somfy.com/ce